


# 7

## HT-CPVC接頭規格


## Specification of HT-CPVC Fittings



### 45° L 型給水接頭 45° Elbow

單位：mm

規格 Size		l	H
○ 15	½"	30	38
○ 20	¾"	35	44
○ 25	1"W	40	51
○ 40	1½"	55	69
○ 50	2"	63	80
◇ 65	2½"	69	90
◇ 80	3"	72	95
◇ 100	4"	92	121
◇ 125	5"	112	150
◇ 150	6"	140	186
◇ 200	8"	172	224



### 90° L 型給水接頭 90° Elbow

單位：mm

規格 Size		l	H
○ 15	½"	30	43
○ 20	¾"	35	50
○ 25	1"W	40	58
○ 40	1½"	55	82
○ 50	2"	63	96
◇ 65	2½"	69	110
◇ 80	3"	72	120
◇ 100	4"	92	152
◇ 125	5"	112	188
◇ 150	6"	140	228
◇ 200	8"	172	288

註 / Note:

- 符合CNS14808氯化聚氯乙烯塑膠管件2018年10月新版標準(正字標誌認證)W系列CPVC管件。
- ◇ 尺寸符合CNS1298標準、材質符合CNS14442(CPVC氯化聚氯乙烯原料等級23447)，23°C耐壓7.5kgf/cm<sup>2</sup>↑，實際使用等級詳洽南亞客服人員。
- Comply with the new version (October, 2018) of CNS 14808 standards—Chlorinated ploy (vinyl chloride) plastic fittings.
- ◇ CPVC fittings comply with CNS 1298 standards (specifications) and CNS 23447 standards (materials)—Grade of CPVC raw materials above 7.5kg/cm<sup>2</sup> of hydrostatic pressure resistance (23°C).Please contact our specialist for the actual grade of materials at any time.

## 7


## HT-CPVC接頭規格

## Specification of HT-CPVC Fittings

## T型同徑給水接頭 Tee

單位：mm

規格	Size	l	l1	H	H1
○ 15	½"	30	30	43	43
○ 20	¾"	35	35	50	50
○ 25	1"W	40	40	58	58
○ 40	1½"	55	55	82	82
○ 50	2"	63	63	96	96
◇ 65	2½"	61	61	110	110
◇ 80	3"	64	64	120	120
◇ 100	4"	84	84	152	152
◇ 125	5"	112	112	188	188
◇ 150	6"	140	140	228	228
◇ 200	8"	172	172	287.5	287



## T型異徑給水接頭 Reducer Tee

單位：mm

規格	Size	l	l1	H	H1
◇ 65X40	2½"X1½"	61	55	100	96
◇ 65X50	2½"X2"	61	63	101	104
◇ 80X20	3"X¾"	72	35	90	82
◇ 80X40	3"X1½"	64	55	100	102
◇ 80X50	3"X2"	72	63	105	115
◇ 80X65	3"X2½"	72	69	113	117
◇ 100X40	4"X1½"	92	55	120	115
◇ 100X50	4"X2"	92	63	125	122
◇ 100X80	4"X3"	92	72	140	132
◇ 125X80	5"X3"	112	72	160	148
◇ 125X100	5"X4"	112	92	174	168
◇ 150X80	6"X3"	140	72	193	155
◇ 150X100	6"X4"	140	92	202	182
◇ 150X125	6"X5"	140	112	214.5	200
◇ 200X100	8"X4"	172	92	236.5	204
◇ 200X150	8"X6"	172	140	264	252


註 / Note:

- 符合CNS14808氯化聚氯乙烯塑膠管件2018年10月新版標準(正字標誌認證)W系列CPVC管件。
- ◇ 尺寸符合CNS1298標準、材質符合CNS14442(CPVC氯化聚氯乙烯原料等級23447)，23°C耐壓7.5kgf/cm<sup>2</sup>↑，實際使用等級詳洽南亞客服人員。
- Comply with the new version (October, 2018) of CNS 14808 standards—Chlorinated poly (vinyl chloride) plastic fittings.
- ◇ CPVC fittings comply with CNS 1298 standards (specifications) and CNS 23447 standards (materials)— Grade of CPVC raw materials above 7.5kg/cm<sup>2</sup> of hydrostatic pressure resistance (23°C).Please contact our specialist for the actual grade of materials at any time.

# 7

## HT-CPVC接頭規格


## Specification of HT-CPVC Fittings



### 同徑普通給水接頭 COUPLING

單位：mm

規格	Size	l	L
○ 15	1/2"	30	67
○ 20	3/4"	35	77
○ 25	1"-W	40	87
○ 40	1 1/2"	55	117
○ 50	2"	63	133
○ 65	2 1/2"	61	145
◇ 80	3"	72	152
◇ 100	4"	92	200
◇ 125	5"	112	235
◇ 150	6"	140	300
◇ 200	8"	172	360



### 異徑普通給水接頭 REDUCER COUPLING

單位：mm

規格	Size	l	l1	L
○ 20X15	3/4" X 1/2"	35	30	71
○ 25X20	1" WX 3/4"	40	35	84
◇ 28X25	1" X 1" W	40	40	90
○ 40X25	1 1/2" X 1" W	55	40	114
○ 50X40	2" X 1 1/2"	63	55	136
○ 65X40	2 1/2" X 1 1/2"	69	55	150
○ 65X50	2 1/2" X 2"	69	63	153
◇ 80X40	3" X 1 1/2"	72	55	165
◇ 80X50	3" X 2"	72	63	165
◇ 80X65	3" X 2 1/2"	72	69	165
◇ 100X40	4" X 1 1/2"	92	55	190
◇ 100X50	4" X 2"	92	63	208
◇ 100X80	4" X 3"	92	72	190
◇ 125X100	5" X 4"	112	92	225
◇ 150X80	6" X 3"	140	72	260
◇ 150X100	6" X 4"	140	92	280
◇ 150X125	6" X 5"	140	112	295
◇ 200X100	8" X 4"	172	92	340
◇ 200X125	8" X 5"	172	112	345
◇ 200X150	8" X 6"	172	140	350

註 / Note:

- 符合CNS14808氯化聚氯乙烯塑膠管件2018年10月新版標準(正字標誌認證)W系列CPVC管件。
- ◇ 尺寸符合CNS1298標準、材質符合CNS14442(CPVC氯化聚氯乙烯原料等級23447)，23°C耐壓7.5kgf/cm<sup>2</sup>↑，實際使用等級詳洽南亞客服人員。
- Comply with the new version (October, 2018) of CNS 14808 standards—Chlorinated poly (vinyl chloride) plastic fittings.
- ◇ CPVC fittings comply with CNS 1298 standards (specifications) and CNS 23447 standards (materials)— Grade of CPVC raw materials above 7.5kg/cm<sup>2</sup> of hydrostatic pressure resistance (23°C).Please contact our specialist for the actual grade of materials at any time.

# 7


## HT-CPVC接頭規格 Specification of HT-CPVC Fittings

### L 型水龍頭接頭 FAUCET FITTING – 90° Elbow

單位：mm

規格 Size	l	H	螺牙 THREAD		H1	
			d	l1		
○ 15	1/2"	30	43	PF 1/2"	17	32
○ 20	3/4"	35	51	PF 3/4"	19	36
○ 25	1"W	40	59	PF 1"	21	40

入銅產品  
(Insert bronze nut)




### S 型水龍頭接頭 FAUCET FITTING – Female Adapter

單位：mm

規格 Size	l	L	螺牙 THREAD		
			d	l1	
○ 15	1/2"	30	PF 1/2"	17	52
○ 20	3/4"	35	PF 3/4"	19	59
○ 25	1"W	40	PF 1"	21	68

入銅產品  
(Insert bronze nut)




### 止閥接頭 MALE ADAPTER

單位：mm

規格 Size	l	L	螺牙 THREAD		
			d	l1	
○ 15	1/2"	30	PF 1/2"	14	65
○ 20	3/4"	35	PF 3/4"	15	75
○ 25	1"W	40	PF 1"	17	85
○ 40	1 1/2"	55	PF 1 1/2"	19	110
○ 50	2"	63	PF 2"	24	125

入銅產品  
(Insert bronze nut)




註 / Note:

- 符合CNS14808氯化聚氯乙烯塑膠管件2018年10月新版標準(正字標誌認證)W系列CPVC管件。
- ◇ 尺寸符合CNS1298標準、材質符合CNS14442(CPVC氯化聚氯乙烯原料等級23447)·23°C耐壓7.5kgf/cm<sup>2</sup>↑，實際使用等級詳洽南亞客服人員。
- Comply with the new version (October, 2018) of CNS 14808 standards—Chlorinated poly(vinyl chloride) plastic fittings.
- ◇ CPVC fittings comply with CNS 1298 standards (specifications) and CNS 23447 standards (materials)—Grade of CPVC raw materials above 7.5kg/cm<sup>2</sup> of hydrostatic pressure resistance (23°C). Please contact our specialist for the actual grade of materials at any time.

# 7

## HT-CPVC接頭規格

## Specification of HT-CPVC Fittings

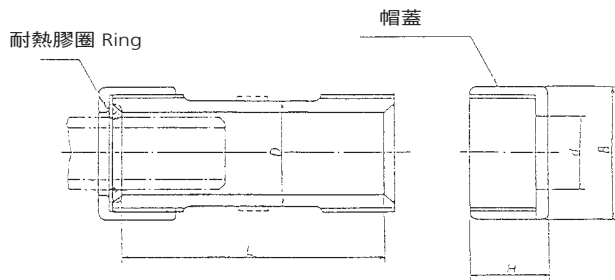

### 伸縮接頭 EXPANSION ADAPTER

單位：mm

規格	Size	D	L	H (最小值)	d	B (最小值)
½"	15	33.8	90	28	22.8	42
¾"	20	37.8	90	29	26.8	47
1"W (開模中)						
2"	50	73	144	40	61.5	90
2 ½"	65	93	183	49	77.5	112
3"	80	108	223	58	90.8	135
4"	100	138	251	67	116.0	168

圖1 FIG.1





圖2 FIG.2



### 塞頭 CAP

單位：mm

規格	Size	t	l	L
圖1 FIG.1	○ 15 ½"	3.5	30	33.5
	○ 20 ¾"	3.5	35	38.5
	○ 25 1"W	4.0	40	44
	○ 40 1½"	4.5	55	59.5
	○ 50 2"	5.0	63	68
圖2 FIG.2	◇ 65 2½"	6.6	69	100
	◇ 80 3"	8.0	72	107
	◇ 100 4"	10.0	92	137
	◇ 125 5"	11.0	112	166
	◇ 150 6"	13.0	140	202
	◇ 200 8"	15.0	172	257
◇ 250 10"	15.0	185	295	

註 / Note:

- 符合CNS14808氯化聚氯乙烯塑膠管件2018年10月新版標準(正字標誌認證)W系列CPVC管件。
- ◇ 尺寸符合CNS1298標準、材質符合CNS14442(CPVC氯化聚氯乙烯原料等級23447)，23°C耐壓7.5kgf/cm<sup>2</sup>↑，實際使用等級詳洽南亞客服人員。
- Comply with the new version (October, 2018) of CNS 14808 standards—Chlorinated poly (vinyl chloride) plastic fittings.
- ◇ CPVC fittings comply with CNS 1298 standards (specifications) and CNS 23447 standards (materials)— Grade of CPVC raw materials above 7.5kg/cm<sup>2</sup> of hydrostatic pressure resistance (23°C).Please contact our specialist for the actual grade of materials at any time.