


6

灰色一般用接頭規格(厚、薄)

Specification of gray fitting (thick and thin)

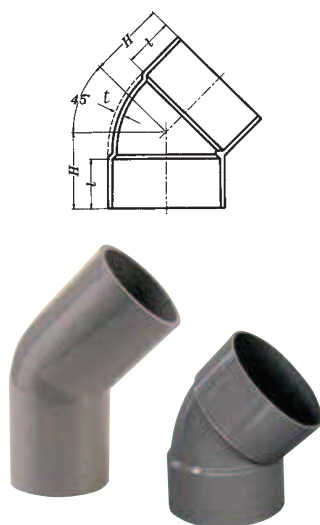


45° L 型接頭 45° Elbow

單位：mm

規格 Size		厚接頭(45° OL) Thick			薄接頭(45° 排L) Thin		
		t	l	H	t	l	H
16	½"	3.5	30	38			
20	¾"	3.5	35	44			
25	1"W	4.0	40	51			
30	1¼"W	4.0	44	56			
40	1½"	4.5	55	69	2.0	22	34
50	2"	5.0	63	80	2.0	25	40
65	2½"	5.0	69	90	2.5	35	53
80	3"	6.0	72	95	3.0	40	63
90	3½"	6.5	80	105	3.0	50	73.5
100	4"	7.5	92	121	3.5	50	78
125	5"	8.0	112	150	3.5	65	100
150	6"	9.0	140	186	4.0	80	120
200	8"	10.5	172	224	7.5	100	155
250	10"	13.0	185	248	8.5	130	191
300	12"				10.0	150	223

註：紅色字體為自來水用接頭規格，亦可用於灰色一般管路配管。

Note: The red font refers the specification of tap water fitting which can also be used for gray piping project.

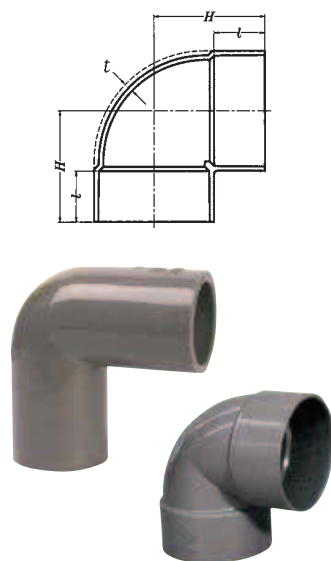

90° L 型接頭 90° Elbow

單位：mm

規格 Size		厚接頭(90° OL) Thick			薄接頭(90° 排L) Thin		
		t	l	H	t	l	H
13	⅜"	3.0	26	36			
16	½"	3.5	30	43			
20	¾"	3.5	35	50			
25	1"W	4.0	40	58			
30	1¼"W	4.0	44	65			
40	1½"	4.5	55	82	2.0	22	48
50	2"	5.0	63	96	2.0	25	58
65	2½"	5.0	69	110	3.0	35	77
80	3"	6.0	72	120	3.0	40	88
90	3½"	6.5	80	135	3.0	50	102
100	4"	7.5	92	152	3.5	50	112
125	5"	8.0	112	188	3.5	65	140
150	6"	9.0	140	228	4.0	80	168
200	8"	10.5	172	288	7.5	100	215
250	10"	13.0	185	326	8.5	130	269
					10.0	150	316

註：紅色字體為自來水用接頭規格，亦可用於灰色一般管路配管。

Note: The red font refers the specification of tap water fitting which can also be used for gray piping project.

註/Note：


厚規格製品亦可依上列圖示之虛線製造。

Thick product of fitting can also be manufactured according to the dotted line of above diagram.

6


灰色一般用接頭規格(厚、薄)

Specification of gray fitting (thick and thin)




45° L型單放口接頭 45° Elbow with Spigot End 單位: mm

規格 Size	厚接頭(45° OL) Thick					薄接頭(45° 排L) Thin			
	t	l	H	H1		t	l	H	H1
40 1½"						2.0	22	47.5	34
50 2"	4.0	63	85	85		2.0	25	57	40
65 2½"						2.5	35	75	53
80 3"	5.5	72	95	95		2.5	40	86.5	61
90 3½"						2.5	50	102	73
100 4"	7.0	92	121	121		3.5	50	110	78
125 5"	7.5	112	148	148					
150 6"	8.5	140	180	180					




90° L型單放口接頭 90° Elbow with Spigot End 單位: mm

規格 Size	厚接頭(90° OL) Thick					薄接頭(90° 排L) Thin			
	t	l	H	H1		t	l	H	H1
40 1½"						2.0	22	47.5	49
50 2"						2.0	25	57	58.5
65 2½"						2.5	35	75	76.5
80 3"						2.5	40	86.5	88
90 3½"						2.5	50	102	103.5
100 4"						3.5	50	110	114



90° L型異徑接頭 90° Reducer Elbow 單位: mm

規格 Size	厚接頭(90° OL) Thick						薄接頭(90° 排L) Thin				
	t	l	l1	H	H1		t	l	l1	H	H1
20x16 ¾"x½"	3.5	35	30	48	44.5						
25x16 1"Wx½"	4	40	30	53	48.5						
25x20 1"Wx¾"	4	40	35	55	53.5						
65x50 2½"x2"							3.0	35	25	69	66



T型同徑接頭 Tee 單位: mm

規格 Size		厚接頭(OT) Thick					薄接頭(排T) Thin				
		t	l	l1	H	H1	t	l	l1	H	H1
13	⅜"	3.0	26	26	36	36					
16	½"	3.5	30	30	43	43					
20	¾"	3.5	35	35	50	50					
25	1"W	4.0	40	40	58	58					
30	1¼"W	4.0	44	44	65	65					
40	1½"	4.5	55	55	82	82	2.0	22	22	48	48
50	2"	5.0	63	63	96	96	2.0	25	25	59	59
65	2½"	6.6	61	61	110	110	2.5	35	35	77	77
80	3"	8.0	64	64	120	120	3.0	40	40	88	88
90	3½"	6.5	80	80	135	135	3.0	50	50	102	102
100	4"	10.0	84	84	152	152	3.5	50	50	112	112
125	5"	8.0	112	112	188	188	3.5	65	65	145	145
150	6"	9.0	140	140	228	228	4.0	80	50	167	167
200	8"	10.5	172	172	287.5	287.5	7.5	100	100	215	215
250	10"	13.0	185	185	325	325	8.5	130	130	270	270
300	12"						10.0	150	150	316	316


註: 紅色字體為自來水用接頭規格, 亦可用於灰色一般管路配管。

Note: The red font refers the specification of tap water fitting which can also be used for gray piping project.

6

灰色一般用接頭規格(厚、薄)

Specification of gray fitting (thick and thin)



T型異徑接頭 Reducer Tee

單位: mm

規格 Size	厚接頭(OT) Thick						薄接頭(排T) Thin						
	t	t1	l	l1	H	H1	t	t1	l	l1	H	H1	
16x13	½"x⅜"	3.5	3.0	30	26	41	38						
20x13	¾"x⅜"	3.5	3.0	35	26	46	40						
20x16	¾"x½"	3.5	3.5	35	30	48	45						
25x13	1"Wx⅜"	4.0	3.0	40	26	51	43						
25x16	1"Wx½"	4.0	3.5	40	30	53	48						
25x20	1"Wx¾"	4.0	3.5	40	35	55	53						
30x13	1¼"Wx⅜"	4.0	3.0	44	26	55	46						
30x16	1¼"Wx½"	4.0	3.5	44	30	57	51						
30x20	1¼"Wx¾"	4.0	3.5	44	35	59	56						
30x25	1¼"Wx1"W	4.0	3.5	44	40	62	61						
40x13	1½"x⅜"	4.5	3.0	55	26	66	52						
40x16	1½"x½"	4.5	3.5	55	30	68	57						
40x20	1½"x¾"	4.5	3.5	55	35	70	62						
40x25	1½"x1"W	4.5	3.5	55	40	73	67						
40x30	1½"x1¼"W	4.5	4.0	55	44	76	71						
50x13	2"x⅜"	5.0	3.0	63	26	74	58						
50x16	2"x½"	5.0	3.5	63	30	76	63						
50x20	2"x¾"	5.0	3.5	63	35	78	68	2.0	2.0	25.0	20.0	45	51
50x25	2"x1"W	5.0	4.0	63	40	81	73						
50x30	2"x1¼"W	5.0	4.0	63	44	84	77						
50x40	2"x1½"	5.0	4.5	63	55	90	88	2.0	2.0	25.0	22.0	52	55
65x20	2½"x¾"	5.0	3.5	69	35	84	74	2.5	2.0	35.0	20.0	57.5	59
65x25	2½"x1"W	5.0	3.5	61	40	82	82						
65x40	2½"x1½"	6.6	4.5	61	55	100	96	3.0	2.0	35.0	22.0	63	62
65x50	2½"x2"	6.6	5.0	61	63	101	104	2.5	2.0	35.0	25.0	68	65
80x20	3"x¾"	6.0	3.5	72	35	90	82						
80x25	3"x1"W	8.0	4.0	64	40	93	88						
80x40	3"x1½"	8.0	4.5	64	55	100	102	3.0	2.0	40.0	22.0	67	70
80x50	3"x2"	6.0	4.5	72	63	105	115	3.0	2.0	40.0	25.0	73	73
80x65	3"x2½"	6.0	5.0	72	69	113	117						
90x40	3½"x1½"							3.0	2.0	50.0	22.0	78	74
90x50	3½"x2"							3.0	2.0	50.0	25.0	84	77
90x65	3½"x2½"							3.0	3.0	50.0	35.0	91	88
100x40	4"x1½"	7.5	4.0	92	55	120	115	3.5	2.0	50.0	22.0	76	83
100x50	4"x2"	7.5	4.5	92	63	125	122	3.5	2.0	50.0	25.0	85.5	85
100x65	4"x2½"							3.5	3.0	50.0	35.0	92	96
100x80	4"x3"	7.5	6.0	92	72	140	132	3.5	3.0	50.0	40.0	98	101
125x65	5"x2½"							3.5	3.0	65.0	35.0	107	110
125x80	5"x3"	8.0	6.0	112	72	160	148	3.5	3.0	65.0	40.0	113	115
125x100	5"x4"	8.0	7.5	112	92	174	168	3.5	3.5	65.0	50.0	127.5	125
150x65	6"x2½"							4.0	3.0	80.0	35.0	122	121
150x80	6"x3"	9.0	6.0	140	72	190	155	4.0	3.0	80.0	40.0	127	126
150x100	6"x4"	9.0	7.5	140	92	202	182	4.0	3.5	80.0	50.0	142	137
150x125	6"x5"	9.0	8.0	140	112	214.5	200						
200x100	8"x4"	10.5	7.5	172	92	236.5	204	7.5	3.5	100.0	50.0	165	165
200x150	8"x6"	10.5	9.0	172	140	264	252	7.5	4.0	100.0	80.0	185	195

註: 1.紅色字體為自來水用接頭規格, 亦可用於灰色一般管路配管。

2. 厚規格製品亦可依上列圖示之虛線製造。


Note: 1.The red font refers the specification of tap water fitting which can also be used for gray piping project.

2.Thick product of fitting can also be manufactured according to the dotted line of above diagram.

6

灰色一般用接頭規格(厚、薄)


Specification of gray fitting (thick and thin)



排氣T型排水接頭 Vent Tee

單位：mm

規格	Size	t	t1	l	l1	H	H1
90x40	3½"x1½"	3.0	2.0	50	22	102	70
90x50	3½"x2"	3.0	2.0	50	25	102	73
100x50	4"x2"	3.5	2.0	50	25	110	80



S型同徑接頭 Coupling

單位：mm

規格 Size	厚接頭(OS) Thick			薄接頭(排S) Thin		
	t	l	L	t	l	L
13	3/8"	3.0	26	57		
16	½"	3.5	30	67		
20	¾"	3.5	35	77		
25	1"W	4.0	40	87		
30	1¼"W	4.0	44	95		
40	1½"	4.5	55	117	2.0	22
50	2"	5.0	63	133	2.0	25
65	2½"	6.6	61	145	2.5	35
80	3"	6.0	72	152	3.0	40
90	3½"	6.5	80	166	3.0	50
100	4"	7.5	92	200	3.5	50
125	5"	8.0	112	235	3.5	65
150	6"	9.0	140	300	4.0	80
200	8"	10.5	172	360	7.5	100
250	10"	13.0	185	400	8.5	130




註：紅色字體為自來水用接頭規格，亦可用於灰色一般管路配管。

Note: The red font refers the specification of tap water fitting which can also be used for gray piping project.

6

灰色一般用接頭規格(厚、薄)

Specification of gray fitting (thick and thin)



S型異徑接頭 Reducer Coupling

單位 : mm

規格 Size		厚接頭(OS) Thick					薄接頭(排S) Thin				
		t	t1	l	l1	L	t	t1	l	l1	L
16x13	1/2"x3/8"	3.5	3.0	30	26	61					
20x13	3/4"x3/8"	3.5	3.0	35	26	68					
20x16	3/4"x1/2"	3.5	3.5	35	30	71					
25x16	1"Wx1/2"	4.0	3.5	40	30	85					
25x20	1"Wx3/4"	4.0	3.5	40	35	84					
28x25	1"x1W"	4.0	4.0	40	40	90					
30x16	1 1/4"Wx1/2"	4.0	3.5	44	30	95					
30x20	1 1/4"Wx3/4"	4.0	3.5	44	35	93					
30x25	1 1/4"Wx1"W	4.0	4.0	44	40	93					
35x30	1 1/4"x1 1/4"W	4.0	4.0	44	44	100					
40x16	1 1/2"x1/2"	4.5	3.5	55	30	114					
40x20	1 1/2"x3/4"	4.5	3.5	55	35	113					
40x25	1 1/2"x1"W	4.5	4.0	55	40	114					
40x30	1 1/2"x1 1/4"W	4.5	4.0	55	44	114					
50x16	2"x1/2"	5.0	3.5	63	30	120					
50x20	2"x3/4"	5.0	3.5	63	35	116					
50x25	2"x1"W	5.0	4.0	63	40	140					
50x30	2"x1 1/4"W	5.0	4.0	63	44	136					
50x40	2"x1 1/2"	5.0	4.5	63	55	136	2.0	2.0	25	22	67
65x40	2 1/2"x1 1/2"	5.0	4.0	69	55	150	2.5	2.0	35	22	77
65x50	2 1/2"x2"	5.0	4.5	69	63	153	2.5	2.0	35	25	80
80x40	3"x1 1/2"	6.0	4.0	72	55	165	3.0	2.0	40	22	87
80x50	3"x2"	8.0	5.0	64	63	165	3.0	2.0	40	25	90
80x65	3"x2 1/2"	6.0	5.0	72	69	165	3.0	2.5	40	35	90
90x40	3 1/2"x1 1/2"						3.0	2.0	50	22	102
90x50	3 1/2"x2"						3.0	2.0	50	25	105
90x65	3 1/2"x2 1/2"						3.0	2.5	50	35	115
90x80	3 1/2"x3"						3.0	3.0	50	40	115
100x40	4"x1 1/2"	7.5	4.5	92	55	190					
100x50	4"x2"	7.5	5.0	92	63	208	3.5	2.0	50	25	105
100x65	4"x2 1/2"	7.5	6.0	92	69	200	3.5	2.5	50	35	115
100x80	4"x3"	10.0	8.0	84	64	190	3.5	3.0	50	40	120
100x90	4"x3 1/2"						3.5	3.0	50	50	120
125x65	5"x2 1/2"						3.5	2.5	65	35	130
125x80	5"x3"	8.0	7.5	112	72	210	3.5	3.0	65	40	140
125x100	5"x4"	11.0	10.0	104	84	229	3.5	3.5	65	50	150
150x65	6"x2 1/2"						4.0	2.5	80	35	160
150x80	6"x3"	9.0	6.0	140	72	260	4.0	3.0	80	40	165
150x100	6"x4"	9.0	7.5	140	92	280	4.0	3.5	80	50	170
150x125	6"x5"	9.0	8.0	140	112	295	4.0	3.5	80	65	170
200x100	8"x4"	10.5	7.5	172	92	340					
200x125	8"x5"	10.5	8.0	172	112	345					
200x150	8"x6"	10.5	9.0	172	140	350	7.5	4.0	100	80	250
250x200	10"x8"	13.0	10.5	185	172	420	8.5	7.5	130	100	300
300x200	12"x8"	15.0	10.5	230	172	495					


註：紅色字體為自來水用接頭規格，亦可用於灰色一般管路配管。

Note: The red font refers the specification of tap water fitting which can also be used for gray piping project.

6

灰色一般用接頭規格(厚、薄)

Specification of gray fitting (thick and thin)

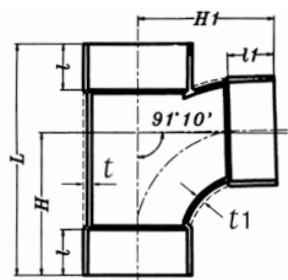

順T型同徑接頭 Sanitary Tee

單位: mm

規格 Size		厚接頭(順T) Thick						薄接頭(排順T) Thin					
		t	l	l1	H	H1	L	t	l	l1	H	H1	L
40	1½"	4.5	55	55	111	111	180	2.0	22	22	68	68	104
50	2"	5.0	63	63	114	127	200	2.0	25	25	87	88	135
65	2½"	5.0	69	69	132	140	234	3.0	35	35	109	105	177
80	3"	6.0	72	72	177	172	280	3.0	40	40	123	125	205
90	3½"							3.0	50	50	130	140	230
100	4"	7.5	92	92	224	219	355	3.5	50	50	155	155	255
125	5"	8.0	112	112	252	233	416	3.5	65	65	200	200	325
150	6"	9.0	140	140	290	295	495	4.0	80	80	238	238	390
200	8"	10.5	172	172	347	360	615	7.5	100	100	300	300	490
250	10"							8.5	130	130	370	370	615

順T型異徑接頭 Reducer Sanitary Tee

單位: mm

規格 Size		厚接頭(順T) Thick							薄接頭(排順T) Thin						
		t	t1	l	l1	H	H1	L	t	t1	l	l1	H	H1	L
50x40	2"x1½"	5.0	4.5	63	55	114	118	192	2.0	2.0	25	22	70	75	114
65x40	2½"x1½"								2.5	2.0	35	22	87	87	138
65x50	2½"x2"	5.0	5.0	69	63	128	130	218	2.5	2.0	35	25	93	92	153
80x40	3"x1½"								3.0	2.0	40	22	90	100	147
80x50	3"x2"	6.0	5.0	72	63	140	145	235	3.0	2.0	40	25	98	105	162
90x40	3½"x1½"								3.0	2.0	50	22	100	100	168
90x50	3½"x2"								3.0	2.0	50	25	109	110	183
90x65	3½"x2½"								3.0	2.5	50	35	115	120	200
100x40	4"x1½"								3.5	2.0	50	22	90	110	160
100x50	4"x2"	7.5	5.0	92	63	154	152	270	3.5	2.0	50	25	100	118	175
100x65	4"x2½"								3.5	3.0	50	35	125	125	210
100x80	4"x3"	7.5	6.0	92	72	194	182	318	3.5	3.0	50	40	133	140	220
125x65	5"x2½"								3.5	2.5	65	35	140	140	238
125x80	5"x3"	8.0	6.0	112	72	235	198	350	3.5	3.0	65	40	130	145	235
125x100	5"x4"	8.0	7.5	112	92	235	219	388	3.5	3.5	65	50	155	160	270
150x50	6"x2"	9.0	5.0	140	63	215	180	420	4.0	2.0	80	25	132	155	237
150x80	6"x3"	9.0	6.0	140	72	230	207	420	4.0	3.0	80	40	151	170	272
150x100	6"x4"	9.0	7.5	140	92	246	234	425	4.0	3.5	80	50	170	180	300
150x125	6"x5"	9.0	8.0	140	112	273	252	468							
200x50	8"x2"	10.5	5.0	172	63	307	210	440							
200x80	8"x3"	10.5	6.0	172	72	307	235	470							
200x100	8"x4"	10.5	7.5	172	92	307	263	510							
200x150	8"x6"	10.5	9.0	172	140	307	320	560	7.5	4.0	100	80	235	265	410
250x150	10"x6"	11.5	9.0	185	140	332	345	588	8.5	4.0	130	80	271	285	474
250x200	10"x8"								8.5	7.5	130	100	312	323	537

註/Note:


厚規格製品亦可依上列圖示之虛線製造。

Thick product of fitting can also be manufactured according to the dotted line of above diagram.

6

灰色一般用接頭規格(厚、薄)

Specification of gray fitting (thick and thin)



Y型同徑接頭 Wye

單位: mm

規格 Size		厚接頭(OY) Thick						薄接頭(排Y) Thin					
		t	l	l1	H	H1	L	t	l	l1	H	H1	L
40	1½"	4.5	55	55	116	119	185	2.0	22	22	80	84	114
50	2"	5.0	63	63	141	142	220	2.0	25	25	100	103	142
65	2½"	5.0	69	69	166	161	260	3.0	35	35	127	133	185
80	3"	6.0	72	72	180	188	280	3.0	40	40	152	154	213
90	3½"							3.0	50	50	171.5	177.5	247
100	4"	7.5	92	92	230	240	355	3.5	50	50	193	194	275
125	5"	8.0	112	112	282	292	434	3.5	65	65	235	240	335
150	6"	9.0	140	140	344	352	530	4.0	80	80	285	285	410
200	8"	10.5	172	172	446	433	690	7.5	100	100	365	375	520

Y型異徑接頭 Reducer Wye

單位: mm

規格 Size		厚接頭(OY) Thick							薄接頭(排Y) Thin						
		t	t1	l	l1	H	H1	L	t	t1	l	l1	H	H1	L
50x40	2"x1½"	5.0	4.5	63	55	132	128	202	2.0	2	25	22	91	91	124
65x40	2½"x1½"	5.0	4.5	69	55	148	133	223	3.0	2	35	22	109	105	148
65x50	2½"x2"	5.0	5.0	69	63	148	152	230	3.0	2	35	25	118	114	162
80x40	3"x1½"								3.0	2	40	22	120	115	160
80x50	3"x2"	6.0	5.0	72	63	164	164	239	3.0	2	40	25	130	123	170
90x40	3½"x1½"								3.0	2	50	22	136	122	177
90x50	3½"x2"								3.0	2	50	25	144	131	192
90x65	3½"x2½"								3.0	2.5	50	35	155	149	217
100x40	4"x1½"								3.5	2	50	22	143	126	177
100x50	4"x2"	7.5	5.0	92	63	195	185	285	3.5	2	50	25	152	142	195
100x65	4"x2½"								3.5	3	50	35	162	160	217
100x80	4"x3"	7.5	6.0	92	72	213	206	319	3.5	3	50	40	173	171	238
125x50	5"x2"	8.0	5.0	112	63	233	192	337	3.5	2	65	25	183	155	228
125x65	5"x2½"								3.5	2.5	65	35	193	180	250
125x80	5"x3"	8.0	6.0	112	72	252	216	372	3.5	3	65	40	205	187	273
125x100	5"x4"	8.0	7.5	112	92	272	252	415	3.5	3.5	65	50	216	212	300
150x50	6"x2"	9.0	5.0	140	63	270	228	385							
150x65	6"x2½"								4.0	2.5	80	35	220	197	280
150x80	6"x3"	9.0	6.0	140	72	282	240	412	4.0	3	80	40	227	206	300
150x100	6"x4"	9.0	7.5	140	92	294	274	435	4.0	3.5	80	50	245	230	340
150x125	6"x5"	9.0	8.0	140	112	322	310	500							
200x50	8"x2"	10.5	5.0	172	63	327	258	445							
200x80	8"x3"	10.5	6.0	172	72	345	282	485							
200x100	8"x4"	10.5	7.5	172	92	362	316	520	7.5	3.5	100	50	292	268	380
200x125	8"x5"	10.5	8.0	172	112	382	349	560	7.5	3.5	100	50	292	268	380
200x150	8"x6"	10.5	9.0	172	140	400	394	600	7.5	4	100	80	328	326	445
250x150	10"x6"	13.0	9.0	185	140	450	430	625							

註: 厚規格製品亦可依上列圖示之虛線製造。

Note: Thick product of fitting can also be manufactured according to the dotted line of above diagram.

Y型接頭單插口 Wye With Spigot End


單位: mm

規格 Size		薄接頭(排Y) Thin					
		厚度	l	l1	H	H1	L
50	2"	2	25	31	98.6	103	142

6


灰色一般用接頭規格

Specification of gray fitting



組合式穿樑接頭 Assembly type Beam Fittings 單位：mm


規格 Size	d	L
2"	62	99
2½"	78	99
3"	91	105
4"	116	119
5"	142	119
6"	167	119



樓板接頭 Slab Joint

單位：mm

規格 Size	D	d	W	l	L
40 1½"	52.5	3.5	5	40	140
50 2"	65	3.5	5	45	140
80 3"	96	3.5	5	50	140
80x65x50 3"x2½"x2"	96	3.5	5	40	140
100 4"	122	3.5	5	50	140



龍L接頭(塑膠牙)

Faucet Fitting — 90° Elbow (Plastic Thread)


單位：mm

規格 Size	l	H	螺牙 THREAD		H1
			d	ι 1	
13x16 ⅜"x½"	26	38	PT½"	17	29
16 ½"	30	43	PT½"	17	32
20 ¾"	35	51	PT¾"	19	36

6

灰色一般用接頭規格


Specification of gray fitting



龍T接頭(塑膠牙)

Faucet Fitting – Fixture Tee (Plastic Thread) 單位：mm

規格 Size	l	H	螺牙THREAD		H1
			d	l1	
13x16	3/8"x1/2"	26	PT1/2"	17	29
16	1/2"	30	PT1/2"	17	32
20x16	3/4"x1/2"	35	PT1/2"	17	34
20	3/4"	35	PT3/4"	19	36




龍S接頭(塑膠牙)

Faucet Fitting – Female Adapter (Plastic Thread)

單位：mm

規格 Size	l	螺牙THREAD		L
		d	l1	
13x16	3/8"x1/2"	PT1/2"	17	47
16	1/2"	PT1/2"	19	57
20	3/4"	PT3/4"	19	59



止閥接頭(塑膠牙)

Male Adapter (Plastic Thread)

單位：mm

規格 Size	l	螺牙THREAD		L
		d	l1	
13	3/8"	PT1/2"	15	50
16	1/2"	PT1/2"	15	54
20	3/4"	PT3/4"	17	64
25	1"W	PT1"	19	71
30	1 1/4"W	PT1 1/4"	22	80
40	1 1/2"	PT1 1/2"	22	92
50	2"	PT2"	26	106
65	2 1/2"	PT2 1/2"	30	120
80	3"	PT3"	33	126
100	4"	PT4"	40	146
125	5"	PT5"	44	177
150	6"	PT6"	44	213

註：紅色字體為自來水用接頭規格，亦可用於灰色一般管路配管。

Note: The red font refers the specification of tap water fitting which can also be used for gray piping project.

6

灰色一般用接頭規格

Specification of gray fitting

圖1 FIG.1





圖2 FIG.2





塞頭 Cap

單位：mm

規格 Size		t	l	L
16	½"	3.5	30	33.5
20	¾"	3.5	35	38.5
25	1"W	4.0	40	44
30	1¼"W	4.0	44	48
40	1½"	4.5	55	59.5
50	2"	5.0	63	68
65	2½"	6.6	69	100
80	3"	8.0	72	107
90	3½"	6.0	80	119
100	4"	10.0	92	137
125	5"	11.0	112	166
150	6"	13.0	140	202
200	8"	15.0	172	257
250	10"	15.0	185	295

註：紅色字體為自來水用接頭規格，亦可用於灰色一般管路配管



Note: The red font refers the specification of tap water fitting which can also be used for gray piping project.

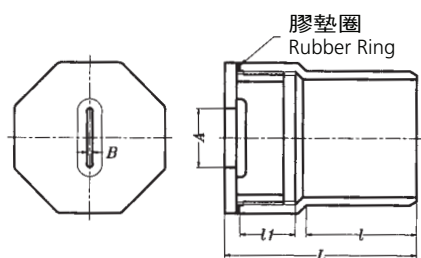

清除孔接頭 Cleanout Bushing

單位：mm

規格 Size		A	B	l	l1	L
50	2"	30	4.5	59	25	90
80	3"	50	4.5	75	38	120
100	4"	50	4.5	93	47	150
125	5"	80	10	120	50	180
150	6"	125	10	128	47	190
200	8"	160	10	175	50	240




法蘭接頭 Flange

單位：mm

規格 Size		t	D	D1	l	螺孔 Hole		L
						d	N	
40	1½"	17	140	105	55	19	4	68
50	2"	17	155	120	63	19	4	76
65	2½"	18	175	140	69	19	4	83
80	3"	18	185	150	72	19	8	86
100	4"	18	210	175	92	19	8	107
125	5"	20	250	210	112	23	8	130
150	6"	22	280	240	140	23	8	165
200	8"	22	330	290	172	23	12	195
250	10"	24	400	355	185	25	12	235
300	12"	30	445	400	230	25	16	295

6


灰色一般用接頭規格 Specification of gray fitting

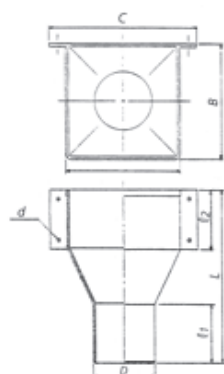

漏斗 Hopper

單位：mm

規格 Size	A	B	C	D	ℓ1	ℓ2	ℓ	L
200 8"	396	396	512	φ 215	φ 12.5	210	200	585




止水板接頭

Coupling with Waterstop Board

單位：mm

規格 Size	D	Z	L
2"	160	4	147
2-1/2"	180	4.5	147
3"	195	5	147
4"	220	5	147
5"	250	5.5	167
6"	275	6	223




雙層止水板接頭

Coupling with Double Waterstop Board

單位：mm

規格 Size	D	D1	Z	L
5"	210	240	5	148



PVC排氣管
PVC exhaust pipe



通氣口接頭 Air Vent

單位：mm

規格 Size	ℓ	L
2"	22	50
2-1/2"	22	52
3"	22	54